




Smart Low Voltage Energy Storage

(Compatible with Single Phase Hybrid Inverter)

Safe & Reliable by CATL Lithium Iron Phosphate (LFP) Cell

ME-B12L-S – 12.28 kWh

ME-B15L-S - 15.46 kWh

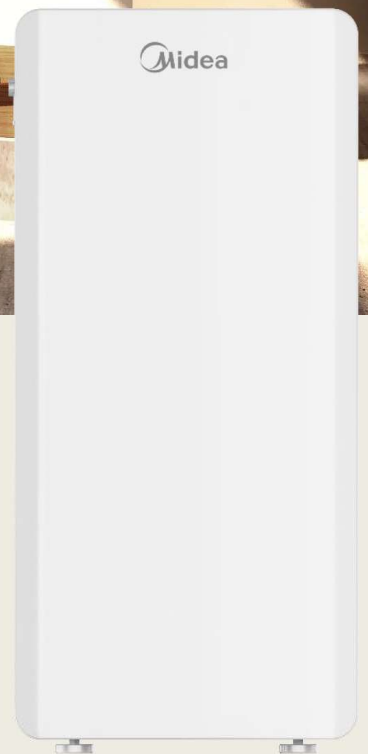

More Usage Scenarios

- Flexible expansion to meet light commercial ESS system
- Supports multiple expansions options - refer to user manual
- Max Scale up 12kWh / 15kWh x 12 battery units in Parallel (max 144kWh / 180kWh on DC)
- Max Scale up to 3 x Inverters in Parallel (max 144kWh/180kWh batteries x 3 = 432kWh /540kWh Max on AC)



Reliable and Patented Charging & Discharging Technology

- CATL Grade-A battery cells inside
- Auto cell balance technology ensures longer lifetime



Easy Installation

- Wall/floor mount with mating connector to make installation easier
- Compact size, only 120kg light weight for 15kWh

Danie Henning
Product Manager
083 707 1229

Shaun Scannell
Product Technical Consultant
082 895 1829

Jason Finlay
Product Technical Consultant
079 375 2854

Prince Mabonda
Technical Support & Training
071 815 6011

* Appearance and parameters are subject to adjustment without prior notice

Model	ME-B12L-S	ME-B15L-S
Battery Parameters		
Nominal Voltage	51.2V	
Nominal Energy	12.28kWh	15.46kWh
Discharge Voltage	45~54V	
Charge Voltage	51.5~57.6V	
Con. Charging Current	200A	
Con. Discharge Current	200A	
Max. Discharge Current	230A	
Con. Discharge DC Power	10,000W	
Max. Discharge DC Power	30,000W / More than 4 units in parallel	
Operating Temperature	Charge:0~55°C Discharge:-20~60°C	
General Data		
Scalability	Paralleling Max 12, refer to user manual	
DoD	90%	
Communication	CAN/RS485	
Cycle Life	≥6000cycles	
IP Grade	IP31	
Installation	Wall mount / Floor-standing	
Dimension [W*D*H]	460*200*980(mm)	460*230*980(mm)
Weight	113 Kg	120Kg
Warranty	5 years product warranty, 10 years performance warranty	
Certification	UN38.3/CE/IEC62619	
* When the temperature < 0°C or > 45°C, the product performance is limited.		